



THE NRCA ROOFING MANUAL CONSTRUCTION DETAIL C-1	COPING • 24 GA. STEEL • 22 GA. STEEL CLEAT • CONTINUOUS FRONT FACE AND BACK FACE CLEAT	ANSI/SPRI ES-1 TESTED RESISTANCE		UL-12 10/30/15
		OUTWARD 90 LBS./SQ. FT.	UPWARD 150 LBS./SQ. FT.	

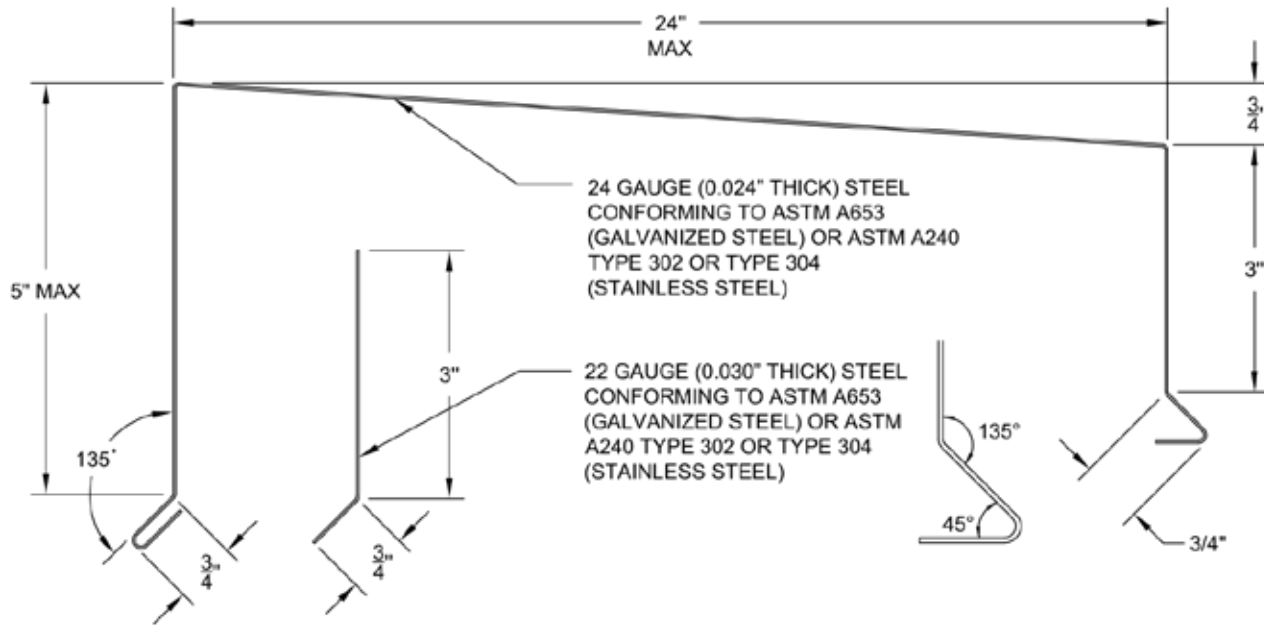


FABRICATION

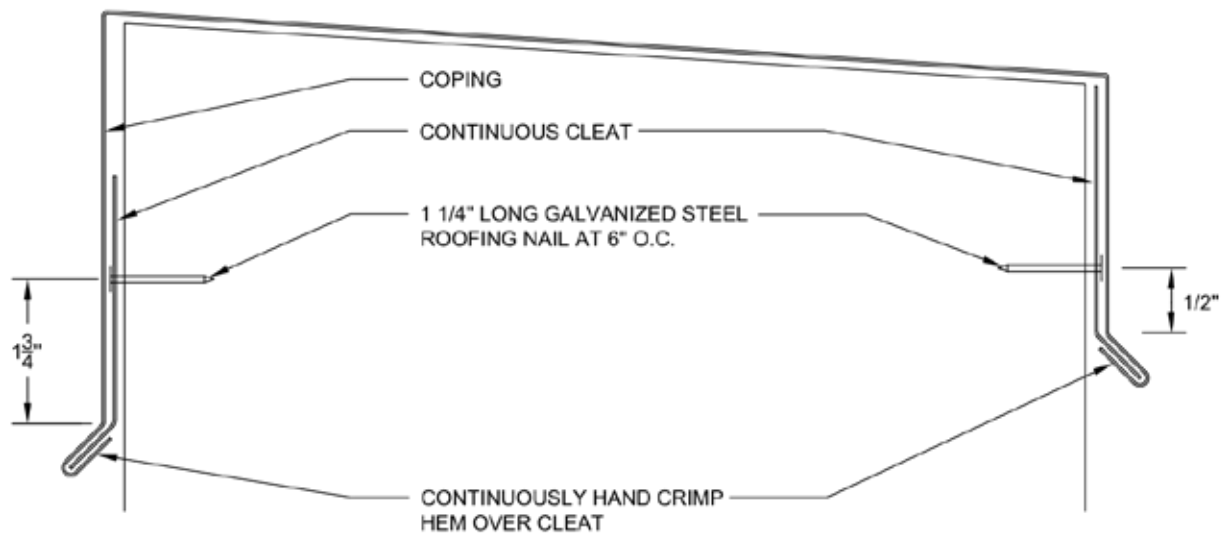


INSTALLATION

THE NRCA ROOFING MANUAL CONSTRUCTION DETAIL C-2	COPING • 24 GA. STEEL • 22 GA. STEEL CLEAT • CONTINUOUS FRONT FACE AND BACK FACE CLEAT	ANSI/SPRI ES-1 TESTED RESISTANCE		UL-12A 10/30/15
		OUTWARD 90 LBS./SQ. FT.	UPWARD 150 LBS./SQ. FT.	

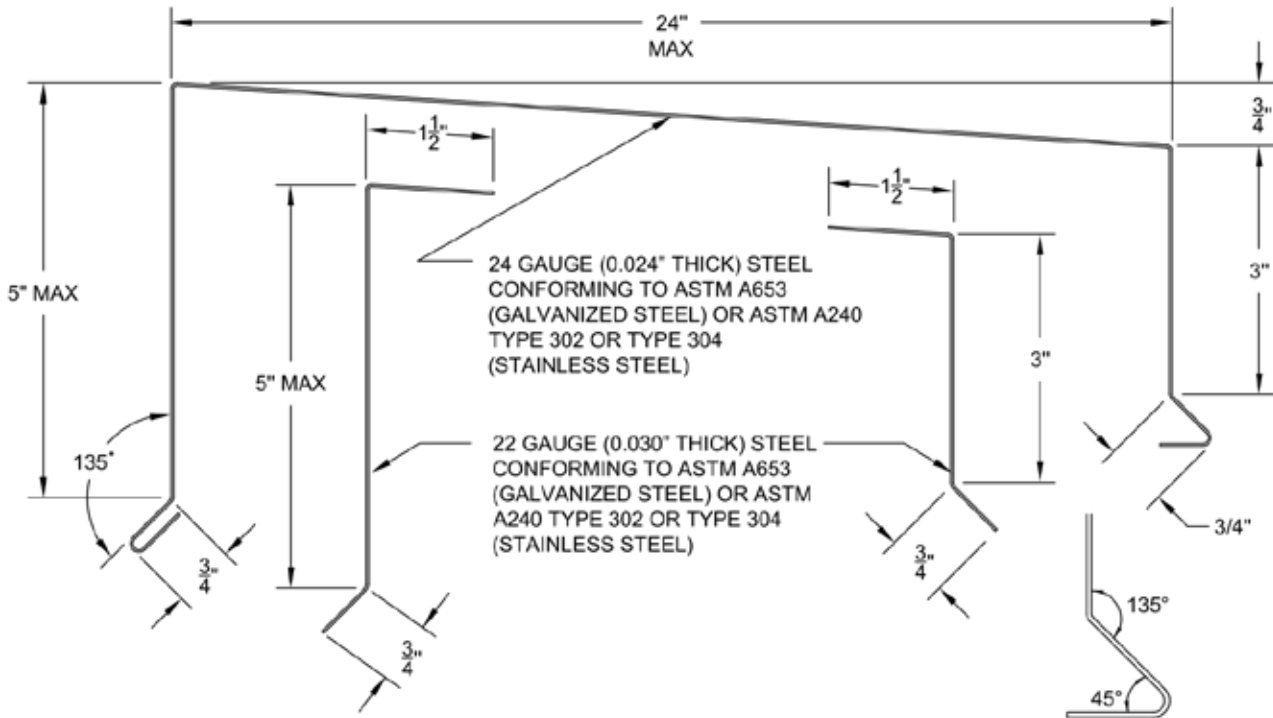


FABRICATION

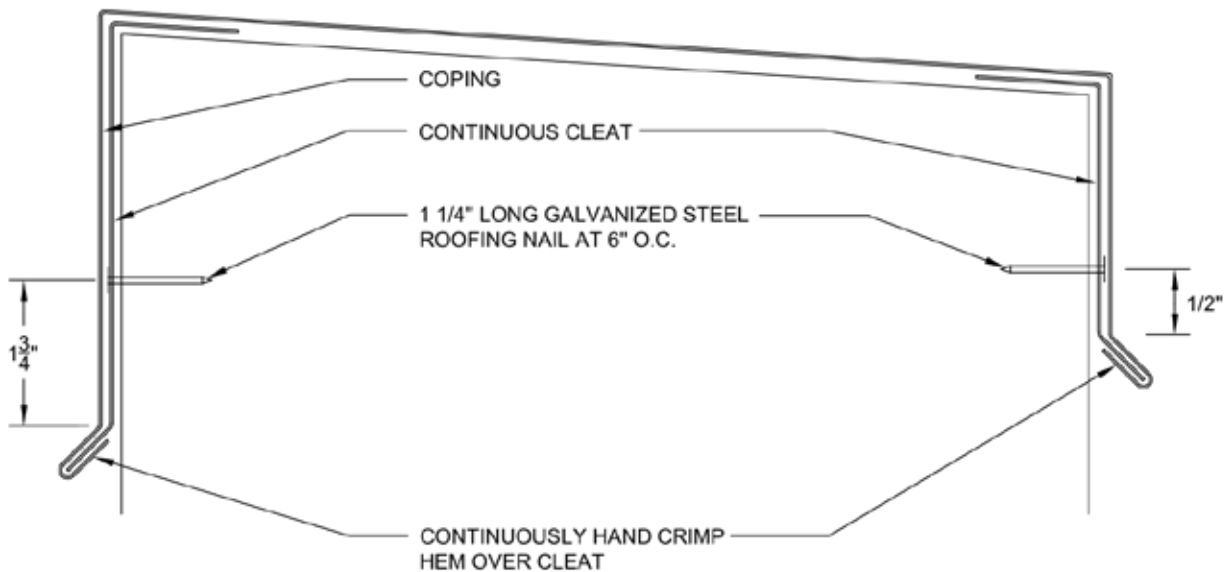


INSTALLATION

THE NRCA ROOFING MANUAL CONSTRUCTION DETAIL C-1	COPING <ul style="list-style-type: none"> • 0.050" ALUMINUM • 0.063" ALUMINUM CLEAT • CONTINUOUS FRONT FACE AND BACK FACE CLEAT 	ANSI/SPRI ES-1 TESTED RESISTANCE		UL-13 2/6/17
		OUTWARD 120 LBS./SQ. FT.	UPWARD 200 LBS./SQ. FT.	

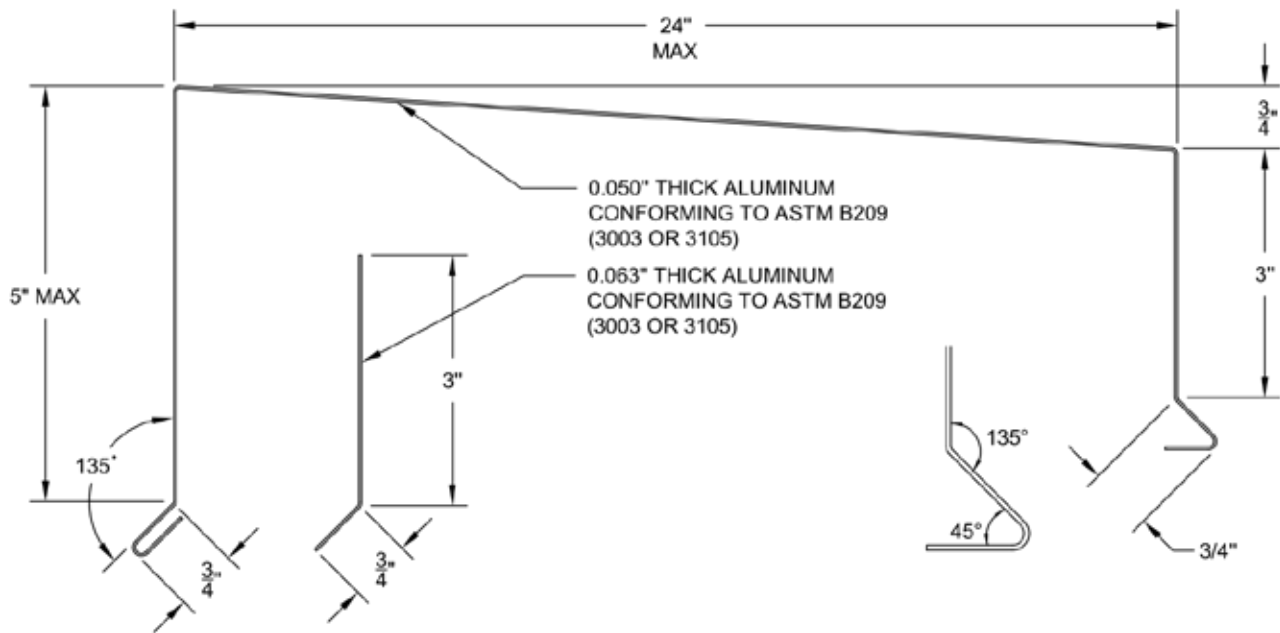


FABRICATION

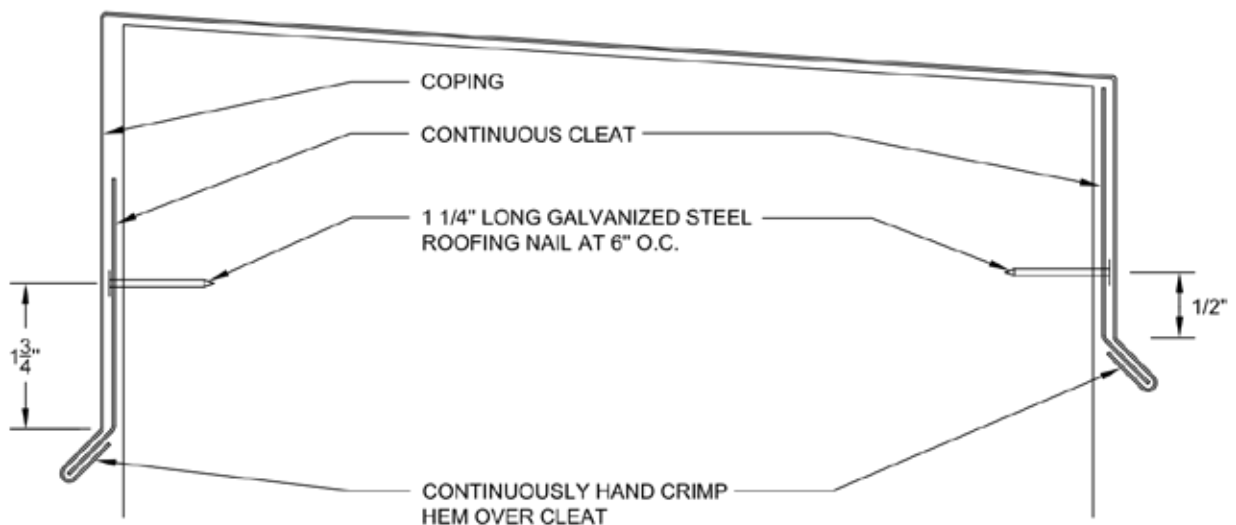


INSTALLATION

THE NRCA ROOFING MANUAL CONSTRUCTION DETAIL C-2	COPING <ul style="list-style-type: none"> • 0.050" ALUMINUM • 0.063" ALUMINUM CLEAT • CONTINUOUS FRONT FACE AND BACK FACE CLEAT 	ANSI/SPRI ES-1 TESTED RESISTANCE	UL-13A 2/6/17
		OUTWARD 120 LBS./SQ. FT. UPWARD 200 LBS./SQ. FT.	

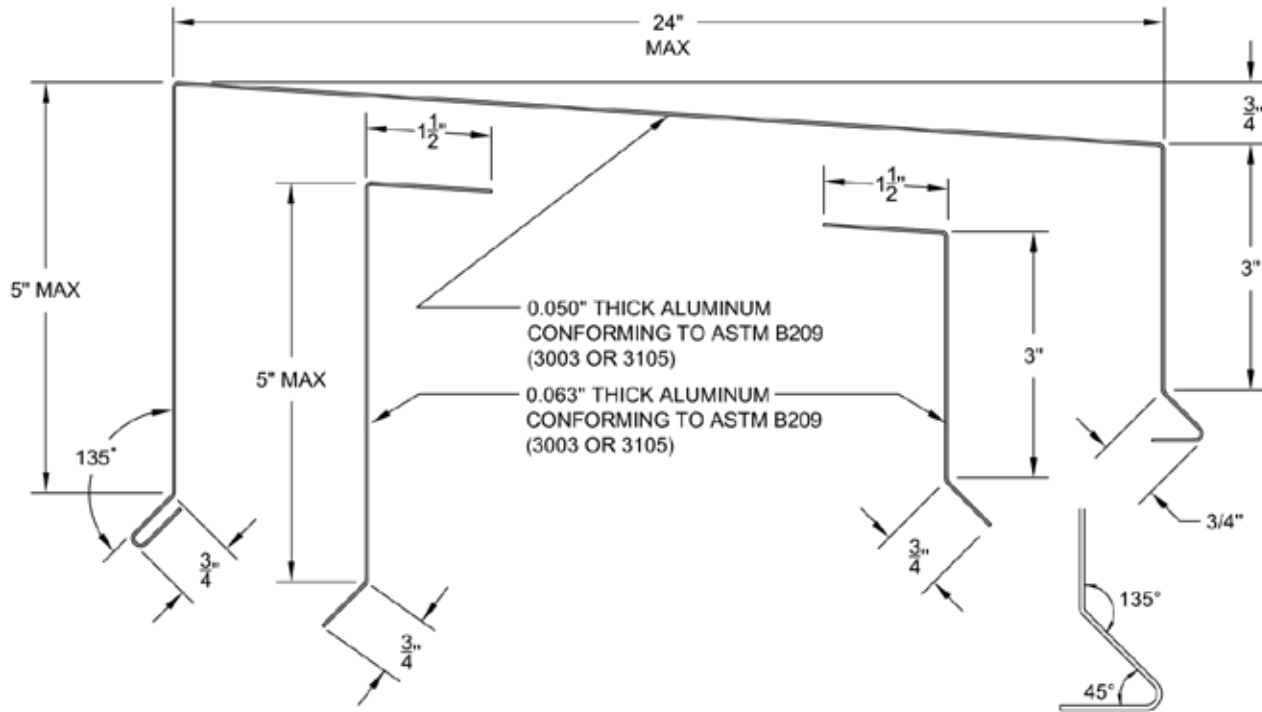

FABRICATION

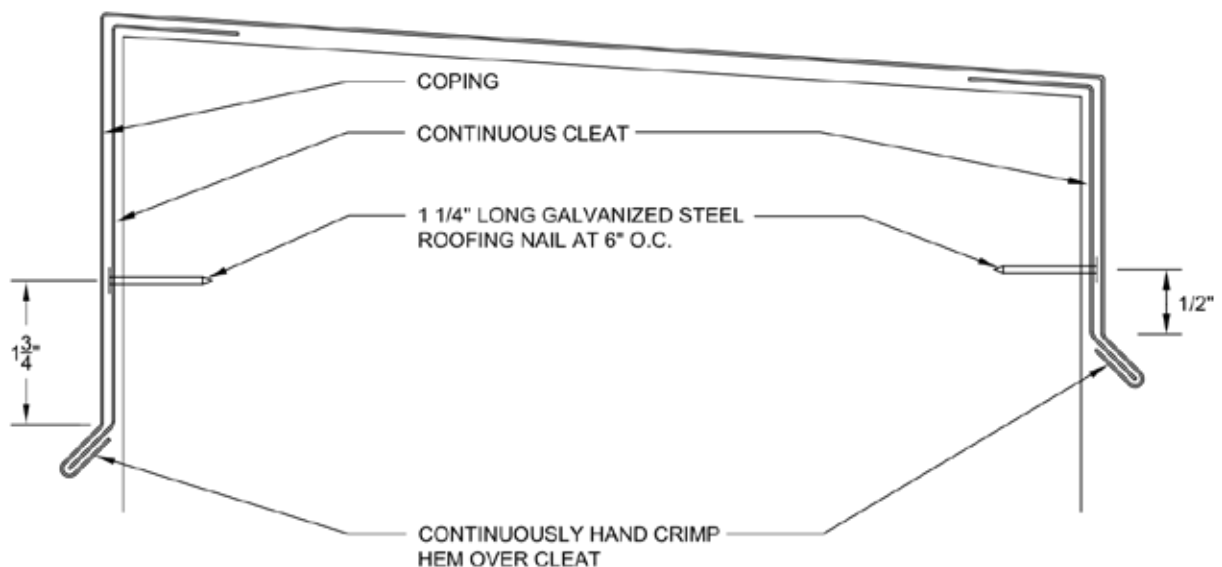

INSTALLATION