

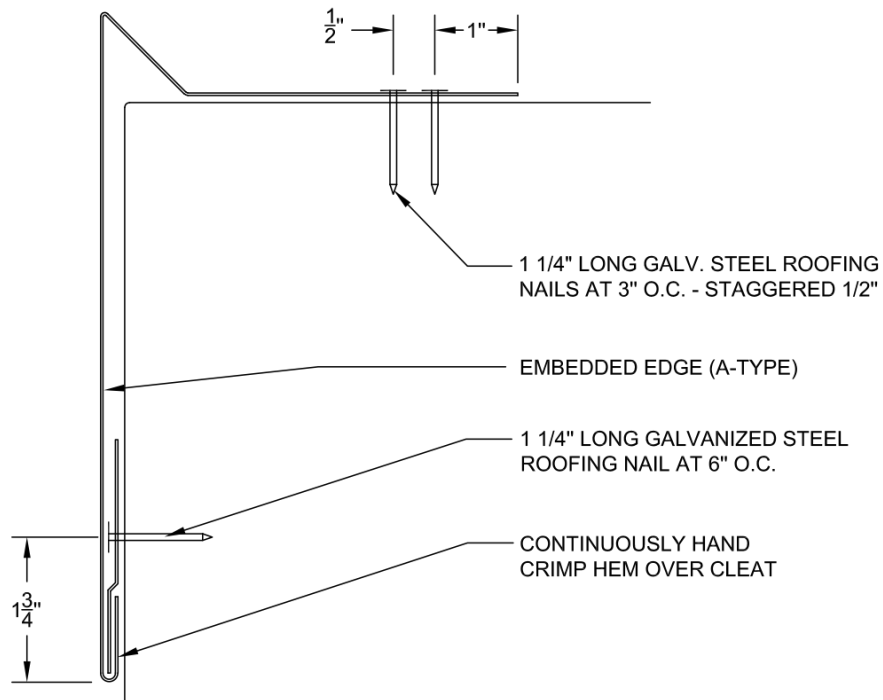
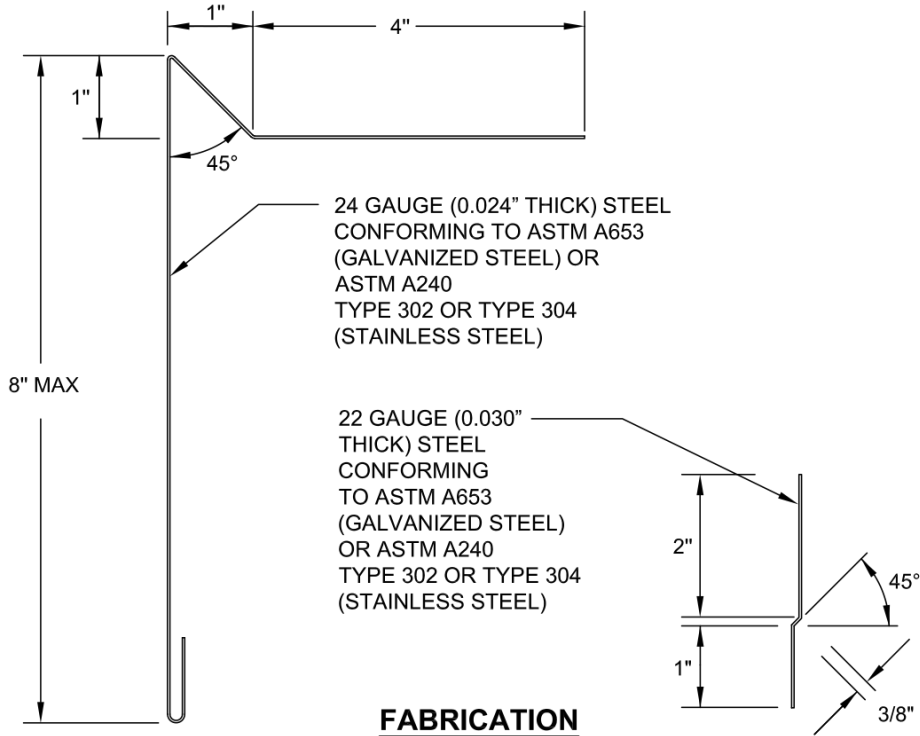




THE NRCA ROOFING MANUAL CONSTRUCTION DETAIL EE-3	EMBEDDED EDGE (A-TYPE) WITH FLAT DRIP <ul style="list-style-type: none"> • 24 GA. STEEL • 22 GA. STEEL CLEAT • CONTINUOUS FRONT FACE CLEAT 	ANSI/SPRI ES-1 TESTED RESISTANCE	UL-28 10/30/15
		390 LBS./SQ. FT.	

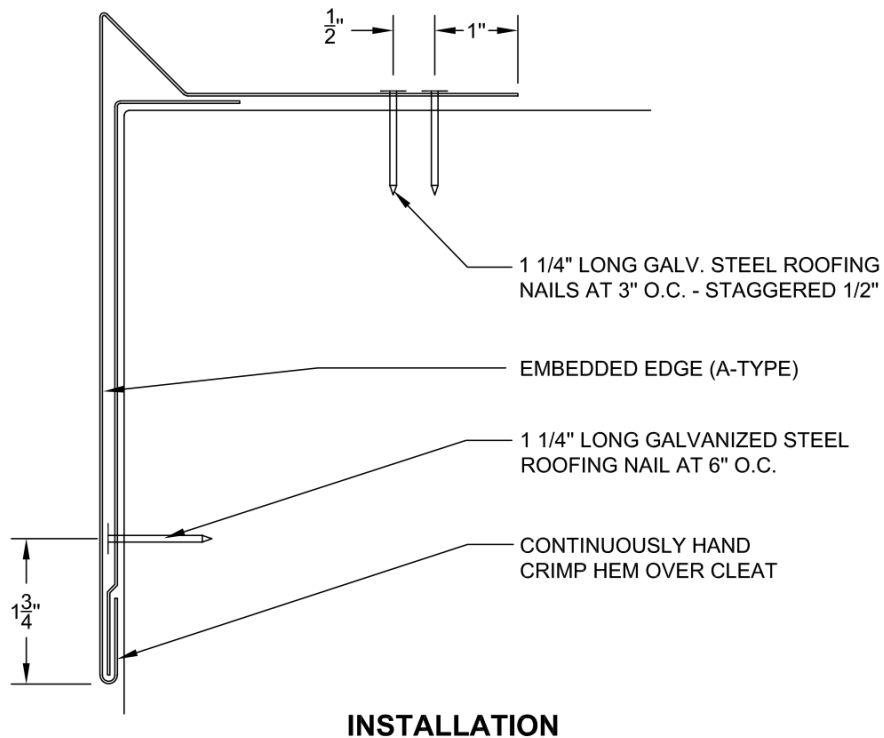

THE NRCA ROOFING MANUAL CONSTRUCTION DETAIL EE-4	EMBEDDED EDGE (A-TYPE) WITH FLAT DRIP <ul style="list-style-type: none"> • 24 GA. STEEL • 22 GA. STEEL CLEAT • CONTINUOUS FRONT FACE CLEAT 	ANSI/SPRI ES-1 TESTED RESISTANCE	UL-28A 10/30/15
		390 LBS./SQ. FT.	

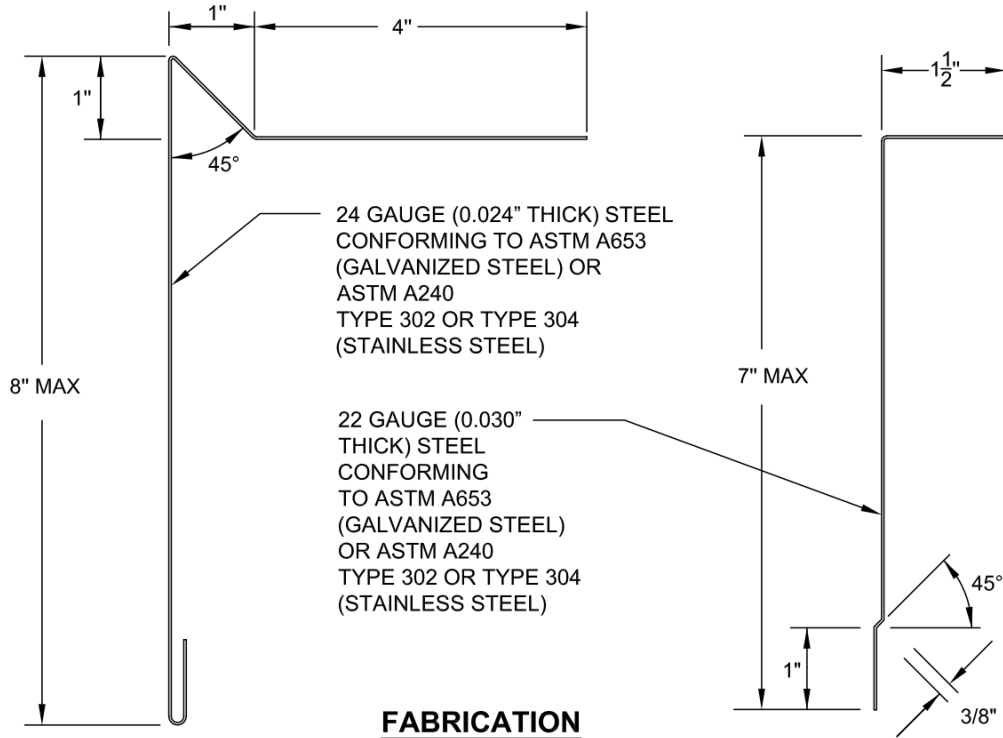

THE NRCA ROOFING MANUAL CONSTRUCTION DETAIL EE-3	EMBEDDED EDGE (A-TYPE) WITH FLAT DRIP <ul style="list-style-type: none"> • 0.040" ALUMINUM • 0.040" ALUMINUM CLEAT • CONTINUOUS FRONT FACE CLEAT 	ANSI/SPRI ES-1 TESTED RESISTANCE	UL-29 2/6/17
		390 LBS./SQ. FT.	

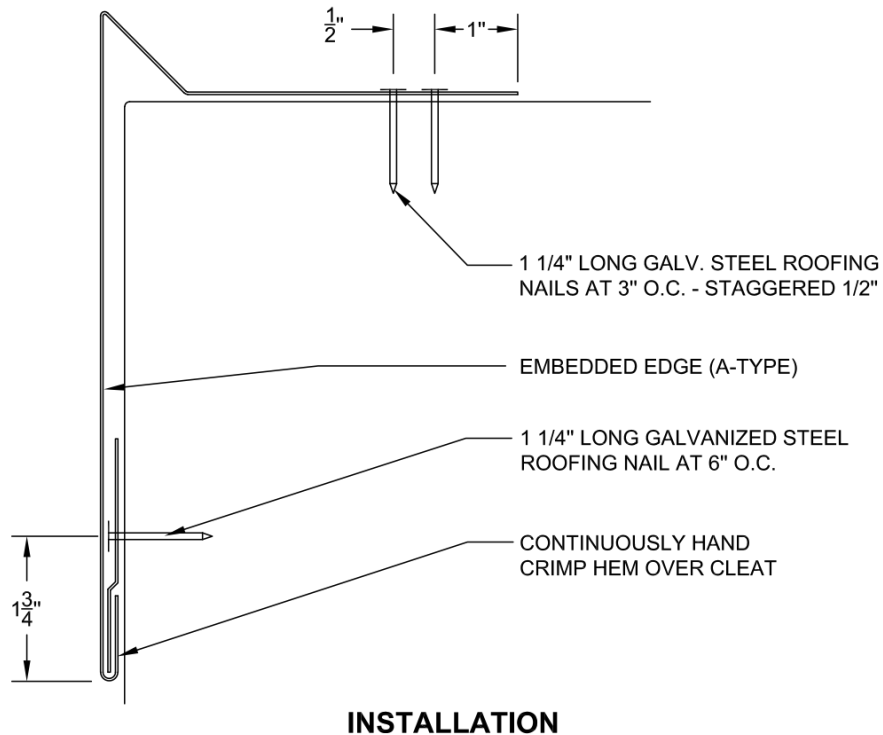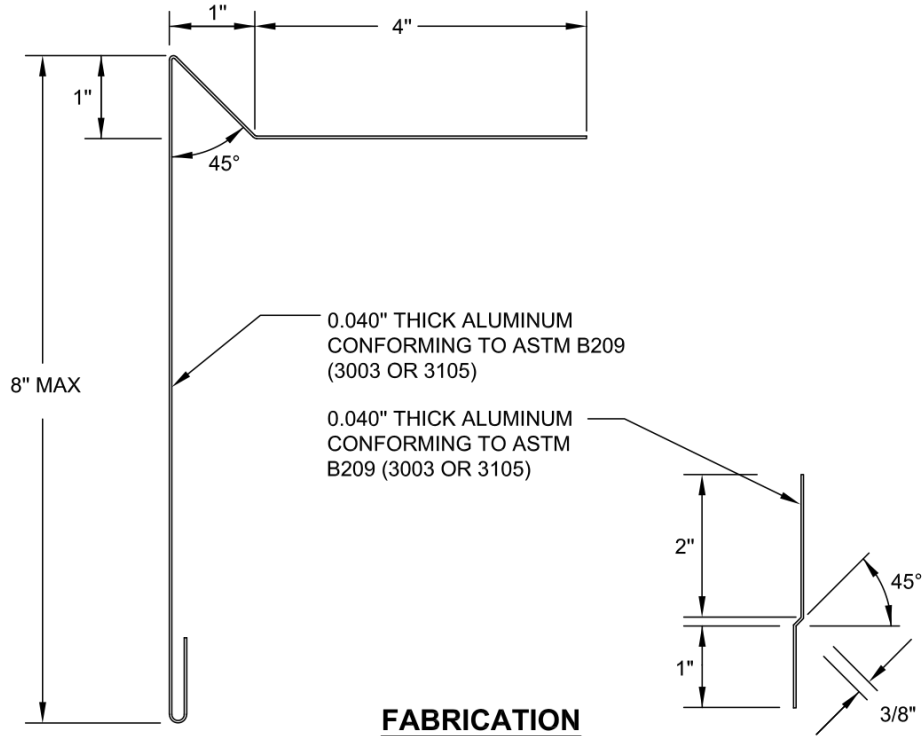

THE NRCA ROOFING MANUAL CONSTRUCTION DETAIL EE-4	EMBEDDED EDGE (A-TYPE) WITH FLAT DRIP <ul style="list-style-type: none"> • 0.040" ALUMINUM • 0.040" ALUMINUM CLEAT • CONTINUOUS FRONT FACE CLEAT 	ANSI/SPRI ES-1 TESTED RESISTANCE	UL-29A 2/6/17
		390 LBS./SQ. FT.	

