



THE NRCA ROOFING MANUAL	FACE EXTENDER • 24 GA. STEEL • 22 GA. STEEL CLEAT • CONTINUOUS FRONT FACE CLEAT	ANSI/SPRI ES-1 TESTED RESISTANCE	UL-34 10/30/15
		210 LBS./SQ. FT.	

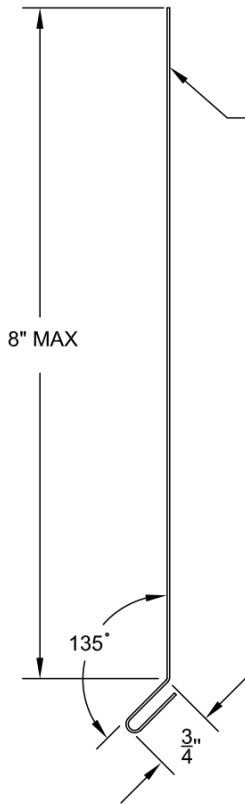

24 GAUGE (0.024" THICK) STEEL CONFORMING TO ASTM A653 (GALVANIZED STEEL) OR ASTM A240 TYPE 302 OR TYPE 304 (STAINLESS STEEL)


22 GAUGE (0.030" THICK) STEEL CONFORMING TO ASTM A653 (GALVANIZED STEEL) OR ASTM A240 TYPE 302 OR TYPE 304 (STAINLESS STEEL)

FABRICATION

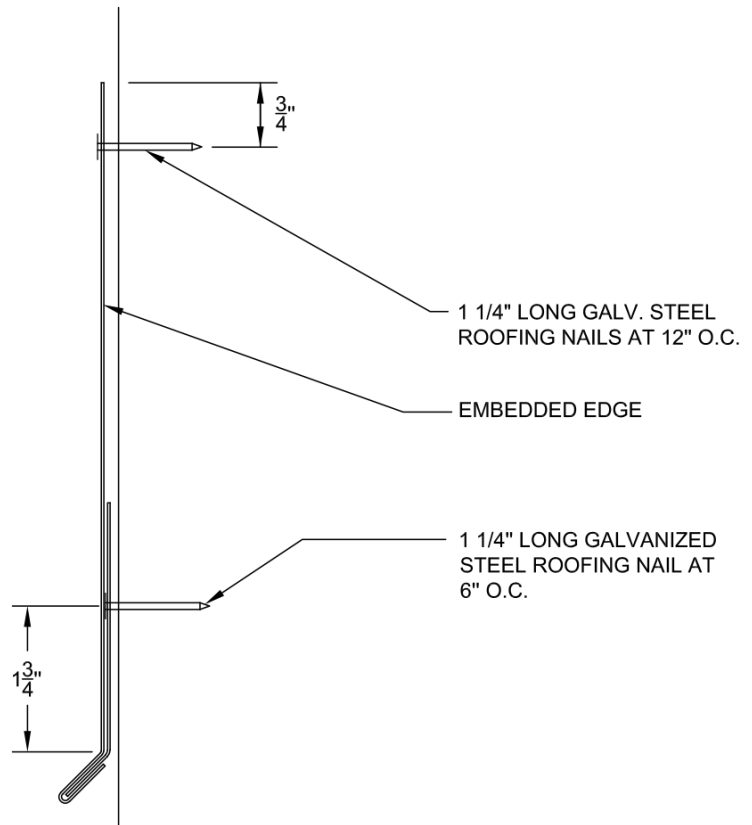

INSTALLATION



THE NRCA ROOFING MANUAL	FACE EXTENDER <ul style="list-style-type: none"> • 0.040" ALUMINUM • 0.050" ALUMINUM CLEAT • CONTINUOUS FRONT FACE CLEAT 	ANSI/SPRI ES-1 TESTED RESISTANCE	UL-35
		220 LBS./SQ. FT.	

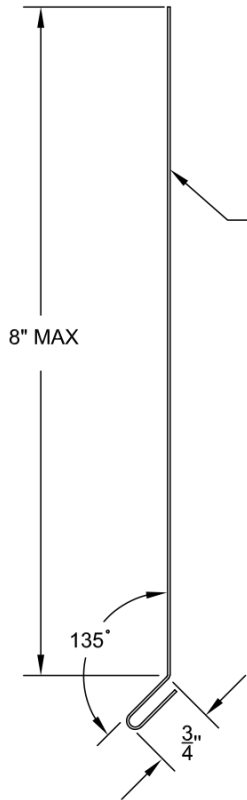

0.040" THICK ALUMINUM
CONFORMING TO ASTM B209
(3003 OR 3105)

0.050" THICK ALUMINUM
CONFORMING TO ASTM B209
(3003 OR 3105)

FABRICATION

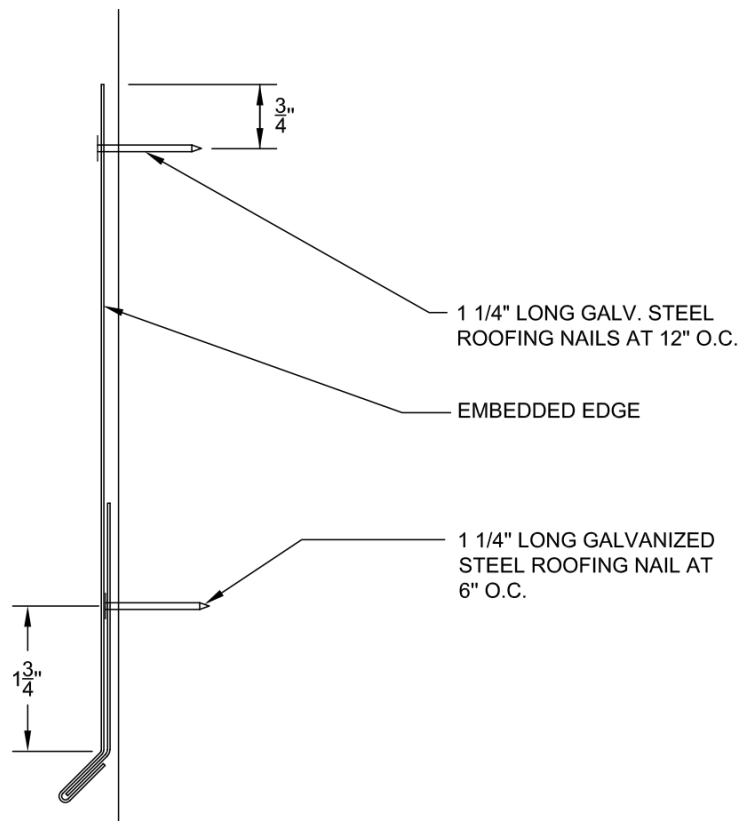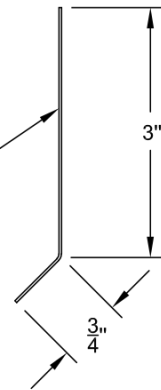

INSTALLATION